

Product Data Sheet

NC-SMQ® 51 SC Solder Paste

Benefits

- Wide reflow process window
- Consistent fine pitch print deposition
- Extended open time
- Superior tack strength
- No-clean residue
- Exceptional wetting in air reflow

Introduction

NC-SMQ® 51SC is an air reflow, no-clean solder paste designed for use in a wide range of environmental conditions. It has exceptional stencil life and tack strength, and offers consistent print definition even in ultra-fine pitch applications. **NC-SMQ51SC**'s wide processing window allows it to be used with standard eutectic Sn/Pb, Sn/Pb/Ag and high temperature alloys including Au/Sn, Pb/Sn and Pb/Sn/Ag.

Alloys

Indium Corporation manufactures low-oxide spherical solder powder composed of Sn/Pb and Sn/Pb/Ag in a standard type 3 mesh size (J-STD-006). Other non-standard mesh sizes are available upon request. The weight ratio of the solder powder to solder paste is referred to as the metal load and is typically in the range of 82-91% for standard alloy compositions.

Standard Product Specifications

Alloy	Metal Load		Mesh Size	Particle Size
	Printing	Dispensing		
Sn63/Pb37	90-90.5%	87%	Type 3	25-45 µ
Sn62/Pb36/Ag2	90-90.5%	87%	-325/+500	0.001-0.0018"

Packaging

Standard packaging for stencil printing applications includes 4oz. jars and 6oz. or 12oz. cartridges. Packaging for enclosed print head systems is also readily available. For dispensing applications, 10cc and 30cc syringes are standard. Other packaging options may be available upon request.

Storage and Handling Procedures

- **NC-SMQ51SC** has a shelf life of 6 months when stored at <10°C.
- When storing solder paste packaged in syringes or cartridges, they should be stored tip down to prevent excessive flux separation.

Packaging Type	Time Interval (Hours)
10cc/30cc Syringes	2
4oz. Jars/6oz. Cartridges	4
12oz. Cartridges/ Enclosed Print Head Cassettes	6
Enclosed Print Head Systems	24

- If refrigerated, the following minimum time intervals should be adhered to for the solder paste to gradually arrive at ambient room temperature before use.
- Solder paste temperature should be verified before use to prevent the use of cold solder paste that can result in poor printing and reflow performance.
- The time and date of removal from refrigerated storage and opening should be clearly marked on the container.

Material Safety Data Sheets

The MSDS for this product can be found online at <http://www.indium.com/techlibrary/msds.php>

OVER→

BELLCORE AND J-STD TESTS & RESULTS

Test	Result	Test	Result
J-STD-004 (IPC-TM-650)		J-STD-005 (IPC-TM-650)	
• Flux Type Classification	ROL1	• Typical Solder Paste Viscosity (Sn63/Pb37, Type 3)	
• Flux Induced Corrosion (Copper Mirror)	Pass	• Brookfield (5 rpm)	
• Presence of Halide:		• 90% Metal Load	850 kcps
• Silver Chromate	Pass	• 90.5% Metal Load	1100 kcps
• Fluoride Spot Test	Pass	• Malcom (10 rpm)	
• Cl Equivalent	<0.019% of paste	• 90% Metal Load	1800 poise
• Post Reflow Flux Residue (ICA Test)	47%	• Typical Thixotropic Index; SSF	-0.60
• Corrosion	Pass	• Slump Test	Pass
• SIR	Pass	• Solder Ball Test	Pass
• Typical Acid Value	85	• Typical Tackiness	38 grams
		• Wetting Test	Pass
		• Bellcore Electromigration	Pass

All information is for reference only. Not to be used as incoming product specifications.

Form No. 97538 R11

www.indium.com

askus@indium.com

ASIA: Singapore, Cheongju: +65 6268 8678
 CHINA: Suzhou, Shenzhen, Liuzhou: +86 (0)512 628 34900
 EUROPE: Milton Keynes, Torino: +44 (0) 1908 580400
 USA: Utica, Clinton, Chicago: +1 315 853 4900



©2008 Indium Corporation

ISO 9001
REGISTERED

NC-SMQ® 51SC Solder Paste

Printing

Stencil Design:

Electroformed and laser cut/electropolished stencils produce the best printing characteristics among stencil types. Stencil aperture design is a crucial step in optimizing the print process. The following are a few general recommendations:

- Discrete components — A 10-20% reduction in stencil aperture area has significantly reduced or eliminated the occurrence of solder beads. The “home plate” design is a common method for achieving this reduction.
- Fine pitch components — A surface area reduction is recommended for apertures of 20 mil pitch and finer. This reduction will help minimize solder balling and bridging that can lead to electrical shorts. The amount of reduction necessary is process dependent (5-15% is common).
- A minimum aspect ratio of 1.5 is suggested for adequate release of solder paste from stencil apertures. The aspect ratio is defined as the width of the aperture divided by the thickness of the stencil.

Printer Operation:

The following are general recommendations for stencil printer optimization. Adjustments may be necessary based on specific process requirements:

- Solder Paste Bead Size: 20-25mm diameter
- Print Speed: 25-50mm/sec.
- Squeegee Pressure: 0.018-0.027kg/mm of blade length
- Underside Stencil Wipe: Once every 10-25 prints
- Solder Paste Stencil Life: >8 hrs. @ 30-60% R.H. & 22-28°C


Cleaning

NC-SMQ51SC is designed for no-clean applications and leaves a benign, hard residue. If desired, the flux residue can be removed by means of solvent, ultra-sonic, water with saponifier, semi-aqueous, or any proven commercially available cleaning method designed for removal of rosin/resin based solder paste flux residues.

Stencil Cleaning: This is best-performed using an automated stencil cleaning system for both stencil and misprint cleaning to prevent extraneous solder balls. Most commercially available stencil cleaning formulations, including isopropyl alcohol (IPA), work well.

Reflow

Recommended Profile:

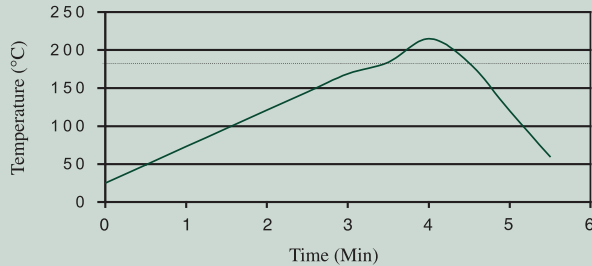

This profile is designed for use with Sn63/Pb37 & Sn62/Pb36/Ag2 alloys. It will serve as a general guideline in establishing a reflow profile for these alloys. Adjustments to this profile may be necessary based on specific process requirements and the use of alloys with different melting temperatures.

Heating Stage:

A linear ramp rate of 0.5°-1°C/second allows gradual evaporation of volatile flux constituents and prevents defects such as solder balling/beading and bridging as a result of hot slump. It also prevents unnecessary depletion of fluxing capacity when using higher temperature alloys.

Liquidus Stage:

A peak temperature of 25°-45°C (215°C shown) above the melting point of the solder alloy is needed to form a quality solder joint and achieve acceptable wetting due to the formation of an intermetallic layer. If the peak temperature is excessive, or the time above liquidus greater than the recommended 45-90 seconds, flux charring, excessive intermetallic formation and damage to the board and components can occur.

Cooling Stage:

A rapid cool down of <4°C/second is desired to produce a fine grain structure in the solder joint. Slow cooling will form a large grain structure, which will typically exhibit poor fatigue resistance. If excessive cooling (>4°C/second) is used, both the components and the solder joint may be stressed due to a high CTE mismatch.

Compatible Products

- Rework Flux: TACFlux 007

This product data sheet is provided for general information only. It is not intended, and shall not be construed, to warrant or guarantee the performance of the products

described which are sold subject exclusively to written warranties and limitations thereon included in product packaging and invoices.

www.indium.com

askus@indium.com

ASIA: Singapore, Cheongju: +65 6268 8678
 CHINA: Suzhou, Shenzhen, Liuzhou: +86 (0)512 628 34900
 EUROPE: Milton Keynes, Torino: +44 (0) 1908 580400
 USA: Utica, Clinton, Chicago: +1 315 853 4900



©2008 Indium Corporation

ISO 9001
REGISTERED