

Product Data Sheet

Indium5.1 Pb-Free Solder Paste



Features

- Wide reflow process window
- Clear residue
- Low voiding
- Industry leading “response to pause” performance
- Outstanding print characteristics and long stencil life
- Excellent wetting to Pb-Free PCB metallizations

Packaging

Standard packaging for stencil printing applications includes 500g jars and 600g Semco cartridges. Packaging for enclosed print head systems is also readily available. For dispensing applications, 10cc and 30cc syringes are standard. Other packaging options may be available upon request.

Storage and Handling Procedures

Refrigerated storage will prolong the shelf life of solder paste. The shelf life of **Indium5.1** is 6 months when stored at <5°C*. Solder paste packaged in syringes and cartridges should be stored tip down.

Solder paste should be allowed to reach ambient working temperature prior to use. Generally, paste should be removed from refrigeration at least two hours before use. Actual time to reach thermal equilibrium will vary with container size. Paste temperature should be verified before use. Jars and cartridges should be labeled with date and time of opening.

Material Safety Data Sheets

The MSDS for this product can be found online at <http://www.indium.com/techlibrary/msds.php>

Introduction

Indium5.1 is an air reflow, no-clean solder paste specifically formulated to accommodate the higher processing temperatures required by the Sn/Ag/Cu and Sn/Ag Pb-Free alloy systems favored by the electronics industry to replace conventional Pb-bearing solders. This product formulation offers consistent, repeatable printing performance combined with long stencil and tack times to handle the rigors of today’s high-speed as well as high-mix surface mount lines. In addition to consistent printing and reflow requirements, this paste offers superb wetting to Pb-Free metallizations in combination with clear residue and low voiding on microvia.

Alloys

Indium Corporation manufactures low-oxide spherical powder composed of a variety of Pb-Free alloys that cover a broad range of melting temperatures. The metal load required is application dependent and will vary with alloy density and mesh size. Type 3 (-325/+500 mesh) powder is standard, but other powder sizes are available. See Standard Product Specifications section for details on metal load and particle size.

Standard Product Specifications

Alloy	Metal Load
SAC (Sn/Ag/Cu)	89% Indium Type 3 88.25% Indium Type 4

OVER→

BELLCORE AND J-STD TESTS & RESULTS

Test	Result	Test	Result
J-STD-004A* (IPC-TM-650)		J-STD-005 (IPC-TM-650)	
•Flux Type (per J-STD-004A)	ROL1	•Typical Solder Paste Viscosity	
•Flux Induced Corrosion (Copper Mirror)	L	•SAC387 (Sn95.5/Ag3.8/Cu0.7, Type 3, 89%)	
•Presence of Halide		•SAC305 (Sn96.5/Ag3/Cu0.5, Type 3, 89%)	
•Silver Chromate	Pass	•Malcom (10 rpm),	2200 poise
•Fluoride Spot Test	Pass	•Slump Test	Pass
•Quantitative Halide Content	<5000ppm	•Solder Ball Test	Pass
•Post Reflow Flux Residue (ICA Test)	37%	•Typical Tackiness	48 grams
•SIR	Pass	•Wetting Test	Pass
		BELLCORE GR-78	
		•SIR	Pass
		•Electromigration	Pass

All information is for reference only. Not to be used as incoming product specifications.

*J-STD-004A has replaced J-STD-004 and is more stringent in its requirements.

Form No. 97901 R5

S O L D E R

INDIUM CORPORATION OF AMERICA®

www.indium.com
 askus@indium.com
 PRC +86 (0)512 628 34900
 SINGAPORE +65 6 268 8678
 UK +44 (0) 1908 580400
 USA +1 315 853 4900



ISO 9001
REGISTERED

Indium5.1 Pb-Free Solder Paste

Printing

Stencil Design:

Electroformed and laser cut/electropolished stencils produce the best printing characteristics among stencil types. Stencil aperture design is a crucial step in optimizing the print process. The following are a few general recommendations:

- Discrete components — A 10-20% reduction of stencil aperture has significantly reduced or eliminated the occurrence of mid-chip solder beads. The “home plate” design is a common method for achieving this reduction.
- Fine pitch components — A surface area reduction is recommended for apertures of 20 mil pitch and finer. This reduction will help minimize solder balling and bridging that can lead to electrical shorts. The amount of reduction necessary is process dependent (5-15% is common).
- For adequate release of solder paste from stencil apertures, a minimum aspect ratio of 1.5 is required. The aspect ratio is defined as the width of the aperture divided by the thickness of the stencil.

Printer Operation:

The following are general recommendations for stencil printer optimization. Adjustments may be necessary based on specific process requirement:

- Solder Paste Bead Size: 20-25mm diameter
- Print Speed: 25-100mm/sec
- Squeegee Pressure: 0.018-0.027kg/mm of blade length
- Underside Stencil Wipe: Once every 10-25 prints
- Solder Paste Stencil Life: >8 hrs. @ 30-60% RH & 22°-28°C

Cleaning

Indium5.1 is designed for no-clean applications, however the flux can be removed if necessary by using a commercially available flux residue remover.


Stencil Cleaning is best performed using isopropyl alcohol (IPA) as a solvent. Most commercially available stencil cleaners work well.

Compatible Products

- Rework Flux: TACFlux 20B

Reflow

Recommended Profile:

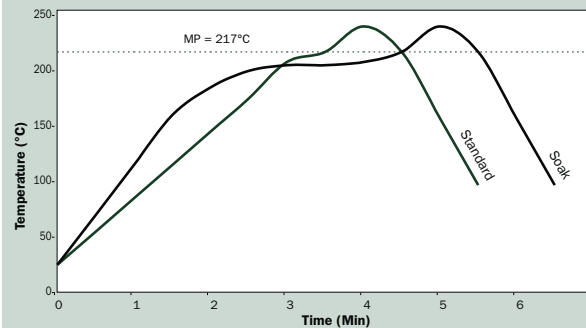

The stated profile recommendations apply to most Pb-Free alloys in the Sn/Ag/Cu (SAC) alloy system, including SAC 305 (96.5Sn/3.0Ag/0.5Cu). This can be used as a general guideline in establishing a reflow profile when using Indium5.1 Solder Paste. Deviations from these recommendations are acceptable, and may be necessary, based on specific process requirements, including board size, thickness & density.

Heating Stage:

A linear ramp rate of 0.5°- 2.0°C/second allows gradual evaporation of volatile flux constituents and helps minimize defects such as solder balling and/or beading and bridging resulting from hot slump. It also prevents unnecessary depletion of fluxing capacity when a high peak temperature and extended time above liquidus is used. A profile with a soak between 200°-210°C for up to 2 minutes can be implemented to reduce void formation on BGA & CSP type devices. A short soak of 20-30 seconds just below the melting point of the solder can help minimize tombstoning.

Liquidus Stage:

A peak temperature of 12° to 43°C above the melting point of the solder alloy is recommended to achieve acceptable wetting and form a quality solder joint. The time above liquidus (TAL) should be 30–90 seconds. A peak temperature and TAL above these recommendations can result in excessive intermetallic formation that can decrease solder joint reliability.

Cooling Stage:

A rapid cool down (1-4°C/second) is desired to form a fine grain structure. Slow cooling will form a large grain structure, which typically exhibits poor fatigue resistance.

This product data sheet is provided for general information only. It is not intended, and shall not be construed, to warrant or guarantee the performance of the

products described which are sold subject exclusively to written warranties and limitations thereon included in product packaging and invoices.

S O L D E R

INDIUM CORPORATION OF AMERICA®

www.indium.com
 askus@indium.com
 PRC +86 (0)512 628 34900
 SINGAPORE +65 6 268 8678
 UK +44 (0) 1908 580400
 USA +1 315 853 4900



ISO 9001
 REGISTERED