

## PRODUCT DATA SHEET

# PoP Flux 30B

## Package-on-Package

### Introduction

**PoP Flux 30B** is a thixotropic no-clean flux designed for package-on-package applications with Pb-free solders. **PoP Flux 30B** has a unique halogen-free activator system that passes IPC SIR tests even before reflow. Precise control of flux volume and reflow are, therefore, not needed, and the flux may be dispensed, as well as dipped, in the usual manner, offering significant equipment cost savings.

### Features

- Application by dipping or dispensing
- Halogen-free
- Optimized for Pb-free (SAC alloy) applications
- Excellent solderability with Cu-OSP, AuNi, and immersion Ag finishes
- Air reflow
- Bubble-free packaging


### Properties

	Value	Test Method
Flux Type Classification	ROLO	J-STD-004 (IPC-TM-650: 2.3.32 and 2.3.33)
Typical Viscosity	8.7kcps	C&P Viscosity (5 minutes)
SIR (Ohms, unreflowed)	Pass (>10 <sup>8</sup> after 7 days @ 85°C and 85% RH)	J-STD-004 (IPC-TM-650: 2.6.3.3 IPC-B-24)
SIR (Ohms)	Pass (>10 <sup>8</sup> after 7 days @ 85°C and 85% RH)	J-STD-004 (IPC-TM-650: 2.6.3.3 IPC-B-24)
Typical Acid Value	102mg KOH/g	Titration
Typical Tack Strength	210g	J-STD-005 (IPC-TM-650: 2.4.44)
Shelf Life	12 months (0–30°C)	Viscosity change/ microscope examination
Color	Yellow/Brown	Visual

*All information is for reference only.  
Not to be used as incoming product specifications.*

### Application

The volume of flux on the package can be optimized by changing equipment parameters. Key variables include: sphere size, sphere pitch, flux shear speed, and dwell. Viscosity can be optimized per application by appropriate equipment setup.

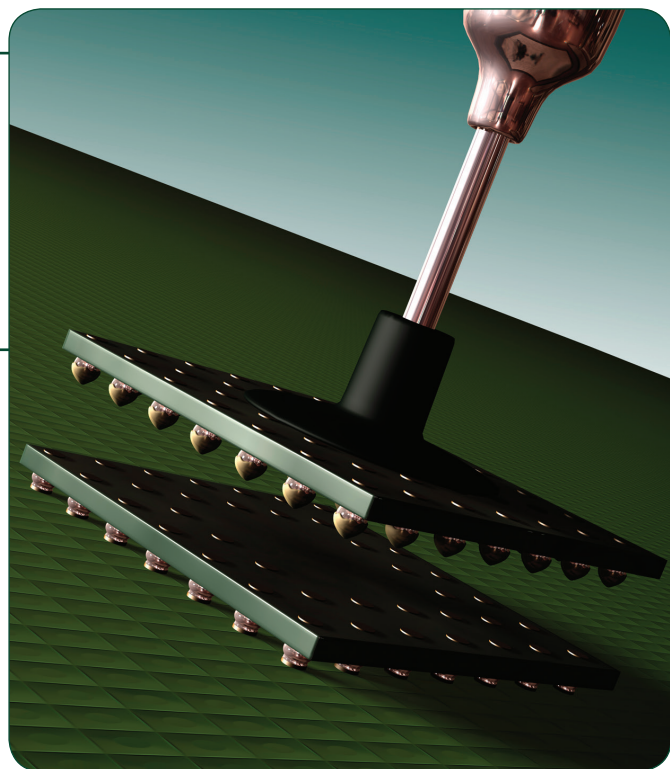

### Cleaning

**PoP Flux 30B** is designed for no-clean applications, and can be left in place on the final package. If necessary, flux residues can be removed by using a commercially available flux cleaner.

### Packaging

**PoP Flux 30B** is available only in air-free 30cc syringes.



### Storage

For maximum shelf life, **PoP Flux 30B** syringes should be stored tip down. Storage temperatures should never exceed 30°C. After removing from cold storage, **PoP Flux 30B** should be allowed to stand for at least 4 hours at room temperature before using.

**From One Engineer To Another®**



## PRODUCT DATA SHEET

# PoP Flux 30B Package-on-Package

### Technical Support



Indium Corporation sets the industry standard in providing rapid response, onsite technical support for our customers worldwide. Indium Corporation's team of Technical Support Engineers can provide expertise in all aspects of Materials Science and Semiconductor Packaging process applications.

### Safety Data Sheets

The SDS for this product can be found online at <http://www.indium.com/sds>

### Reflow

#### Recommended Profile:

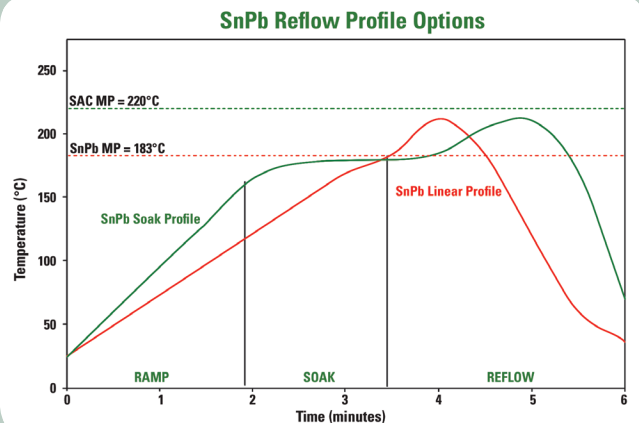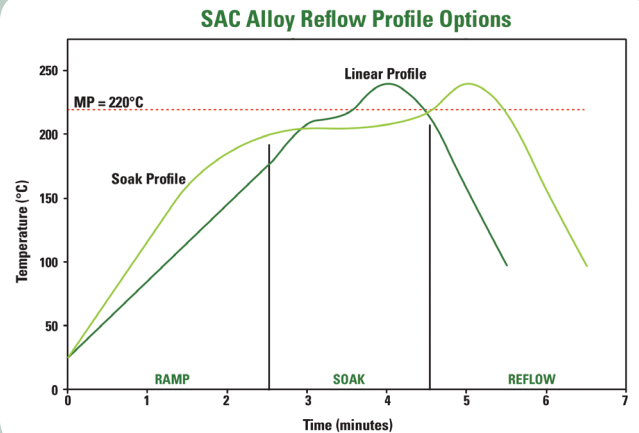

Peak reflow temperature should be <250°C in an air or nitrogen atmosphere, with a linear ramp up to approximately 30°C above the solidus temperature.

This product data sheet is provided for general information only. It is not intended, and shall not be construed, to warrant or guarantee the performance of the products described which are sold subject exclusively to written warranties and limitations thereon included in product packaging and invoices. All Indium Corporation's products and solutions are designed to be commercially available unless specifically stated otherwise.

All of Indium Corporation's solder paste and preform manufacturing facilities are IATF 16949:2016 certified. Indium Corporation is an ISO 9001:2015 registered company.

Contact our engineers: [askus@indium.com](mailto:askus@indium.com)

Learn more: [www.indium.com](http://www.indium.com)

ASIA +65 6268 8678 • CHINA +86 (0) 512 628 34900 • EUROPE +44 (0) 1908 580400 • USA +1 315 853 4900



©2020 Indium Corporation