


## PRODUCT DATA SHEET

# WS-829

## Halogen-Free Ball-Attach and LED Die-Attach Flux

### Introduction

**Ball-Attach Flux WS-829** is a halogen-free water-soluble ball-attach and LED die-attach flux designed for use in pin transfer and printing applications for ball-attachment to substrates (BGA manufacturing) and wafer/panel (WLP/PLP manufacturing). **WS-829** can also be used for LED die-attach application. Its thixotropic property allows it to be printed on a substrate consistently with superb print definition for very small deposit without slumping. Its rheology is specifically designed for use with even the smallest gravity-fed spheres. **WS-829** has an activator system powerful enough to promote wetting on the most demanding substrate metallizations. Flux residue of **WS-829** can be effectively cleaned with just DI water only without leaving any contamination behind.

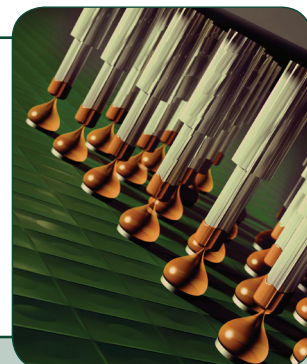


### Features


- Designed for ball-attach process, pin transfer, and printing applications
- Also suitable for miniLED or microLED die-attach application, printing through stencil for ultrafine aperture
- Halogen-free—per IPC and IEC specifications
- Flux rheology suitable even for smallest sphere size
- Thixotropic property ensures good print definition with minimal slump
- Promotes excellent solderability and wetting on a wide range of surfaces
  - Good results on AuNi and even on oxidized Cu-OSP (up to 0.3mm thick OSP)
- Promotes strong, low-voiding joints
- Cleans well with room temperature DI water
  - Saves money on water heating
  - No undesirable flux residue or contamination
- Designed for Pb-free applications
  - Suitable for all high-tin solders
- Ensures consistent joint quality by providing consistent pin transfer and printing performance over extended periods
- Reduces “double ball” and “missing balls”
  - Maintains tackiness during heating, results in minimal sphere movement
- Reflows in air or nitrogen
- Stable at room temperature for up to 6 months

### Standard Ball-Attach Process

#### Pin Transfer Application

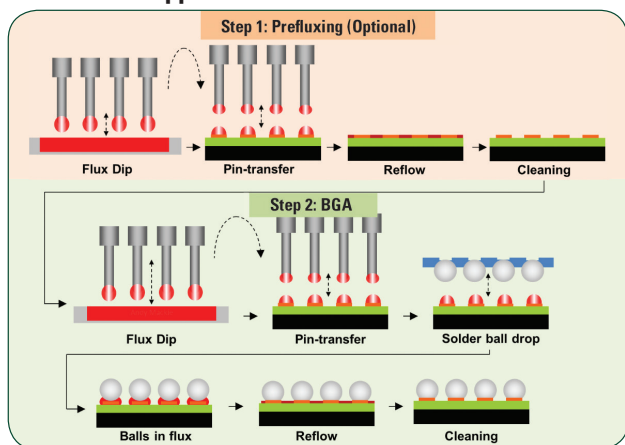

#### Printing Application

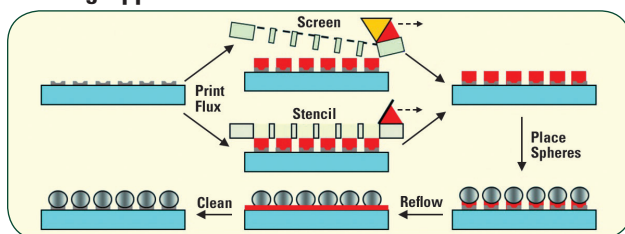

### Flux Properties

#### Industry Standard Test Results and Classification

Flux Classification	ORH0
Based on the testing required by IPC J-STD-004A.	
Halogen-free per IEC 61249-2-21, Test Method EN14582	<900 ppm Cl <900 ppm Br <1,500ppm Total

	Value	Test Method
Typical Viscosity	18kcps (5 minutes)	Brookfield HB DVII±CP (5rpm)
Typical Acid Number	84mg KOH/g	Titration
Typical Tack Strength	300g	J-STD-005 (IPC-TM-650: 2.4.44)
Shelf Life	0–30°C for 6 months	Viscosity change/ microscope examination

All information is for reference only.  
Not to be used as incoming product specifications.

From One Engineer To Another®




## PRODUCT DATA SHEET

# WS-829 Halogen-Free Ball-Attach and LED Die-Attach Flux

## Pin Transfer

### Viscosity Test Method

- **Equipment**
  - Brookfield Cone & Plate
  - Model: DV3THBCB
- **Parameters**
  - Spindle: CP-51
  - Temperature: 25°C
  - Rpm: 10rpm

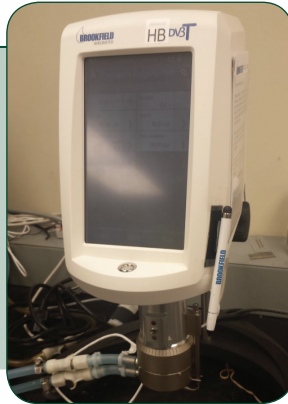




### Tack Test Method

- **Equipment**
  - Texture Technologies TA.XT2
- **Parameters**
  - Ambient Conditions
  - Humidity: 50% ± 3%
  - Room Temperature: 21.5°C ± 2°C




## Viscosity as a Function of Time

### Viscosity Controls

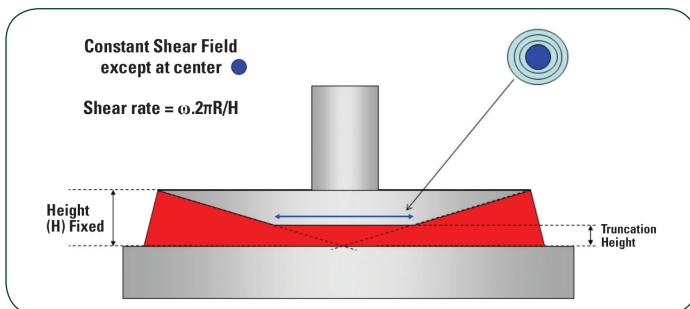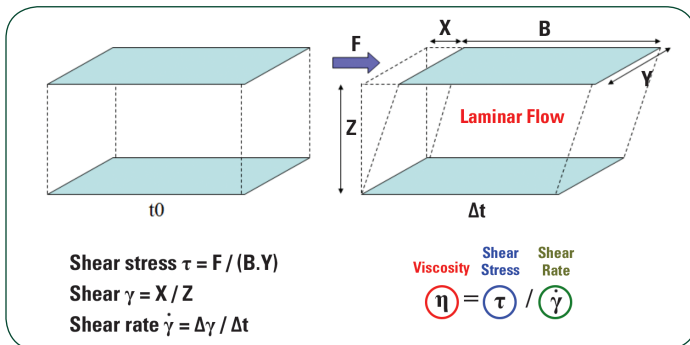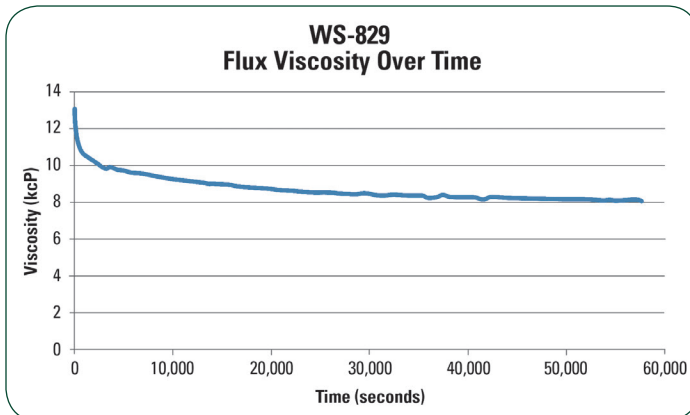

## Tack as a Function of Time

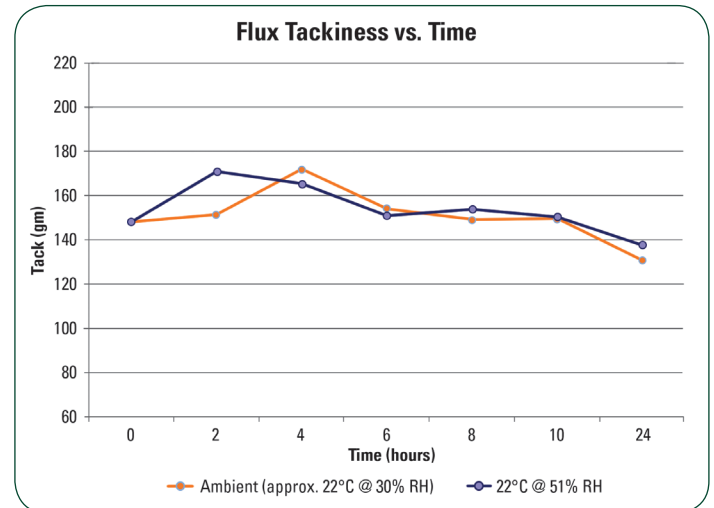

## Consistent Flux Deposition

WS-829's consistent viscosity and tack ensures consistent flux deposit sizes and eliminates missing ball before reflow.

## PRODUCT DATA SHEET

# WS-829 Halogen-Free Ball-Attach and LED Die-Attach Flux

## Printing



### Printing Response-to-Pause (RTP) Test Method










1. Knead 30 cycles @ 50mm/sec
  - a. Print one test board (0 hours)
  - b. Run a wet/dry/vac understencil wipe and pause for 1 hour
2. Knead 80 cycles @ 50mm/sec
  - a. Print one test board (1 hour)
  - b. Run a wet/dry/vac understencil wipe and pause for 1 hour
3. Repeat Step 2 another 3 times for printing test board at 2, 3, and 4 hours

### Consistent Printing Performance

Consistent printing performance over extended periods ensures good joint quality.

## Slump Test

- Inspect test boards from above test every 30 minutes for up to 2 hours

Results			
(Pictures at different time intervals are selected since all show minimal variation)			
	Initial Flux Printed	60-Minute Flux Printed	120-Minute Flux Printed
0 Hours			
2 Hours			
4 Hours			


## PRODUCT DATA SHEET

# WS-829 Halogen-Free Ball-Attach and LED Die-Attach Flux

## Reflow

### Reflow

#### Recommended Profile:

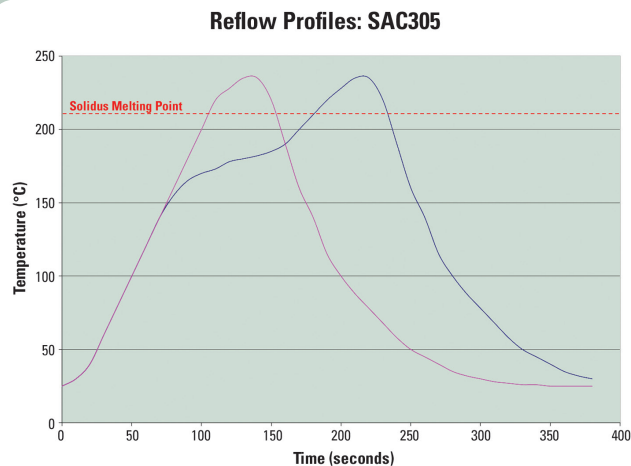

**WS-829** is suitable for air and nitrogen reflow, and can work well in a variety of reflow profiles.

$$S_R = \frac{D-H}{D} \times 100 \dots \dots \dots (16)$$

where,  $S_R$ : spreading ratio (%)


$H$ : height of the spread solder (mm)

$D$ : diameter of the solder, when it is assumed to be a sphere (mm)

$$D = 1.24V^{1/3}$$


$V$ : mass ( $^{12}$ )/density of tested solder

### Wetting Comparison

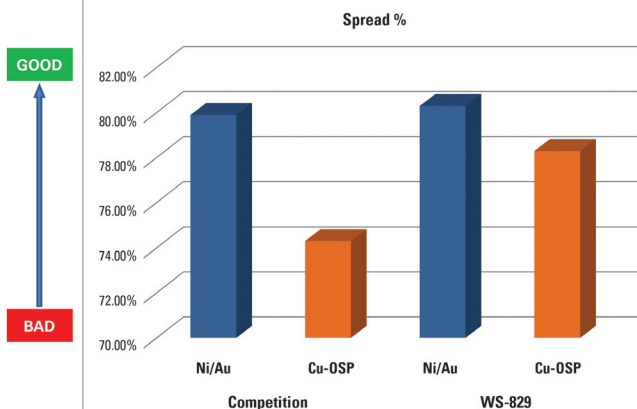

## Eliminates Missing Ball and Increases Joint Strength

**WS-829** eliminates missing ball during reflow by high viscosity and rapid soldering. Joint strength is high due to good wetting.

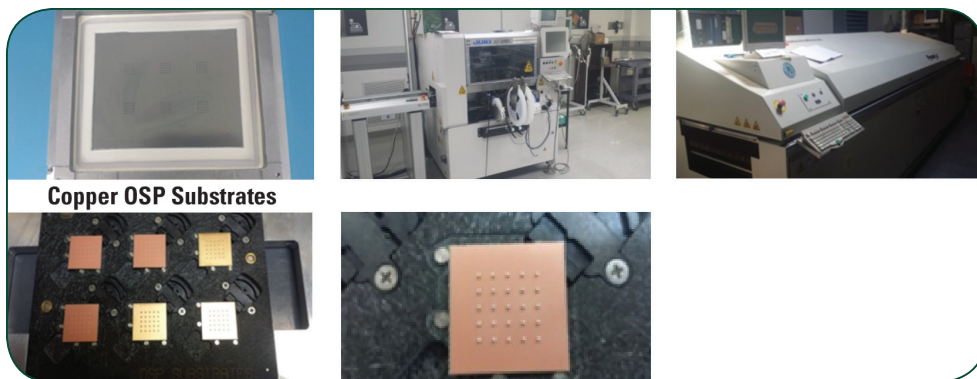

### Solderability Test Method

- Print flux onto metallized surface
- Place spheres onto flux deposit
- Reflow (air or  $N_2$  [typical])
- Measure reflowed height deposit
- Calculate spreading ratio (wetting)





## PRODUCT DATA SHEET

# WS-829 Halogen-Free Ball-Attach and LED Die-Attach Flux Cleaning

### Cleaning Process


Using in-line DI water spray cleaning equipment

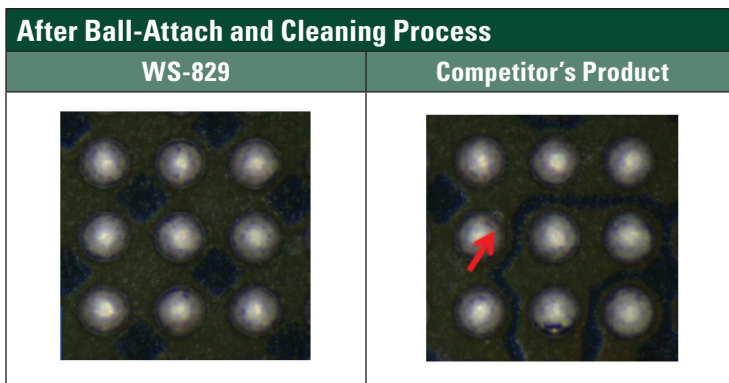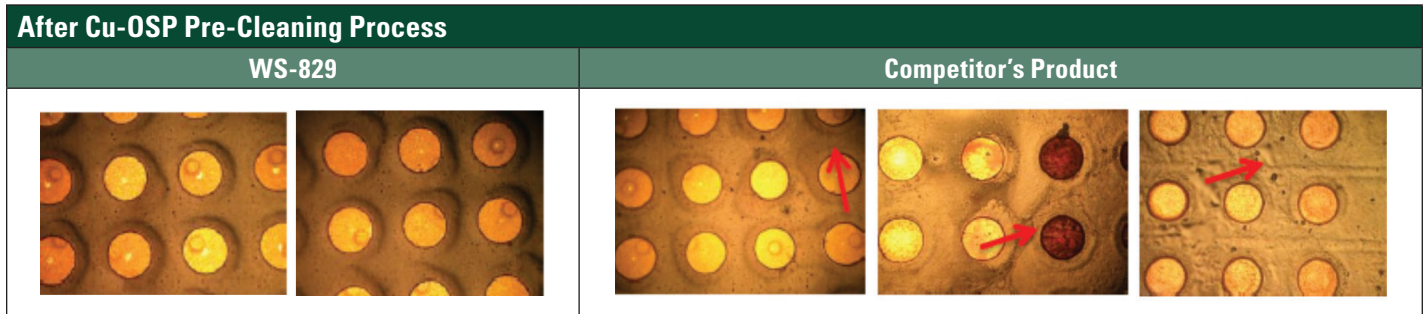


### Best-in-Class Cleanability

**WS-829** was able to remove Cu-OSP and most stubborn contamination on the substrate, and residue was easily removable with standard cleaning process.

### Step-by-Step Process

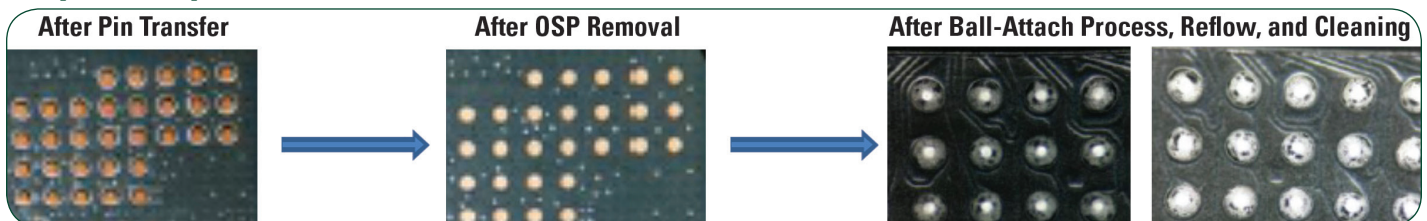

### Minimal Voiding

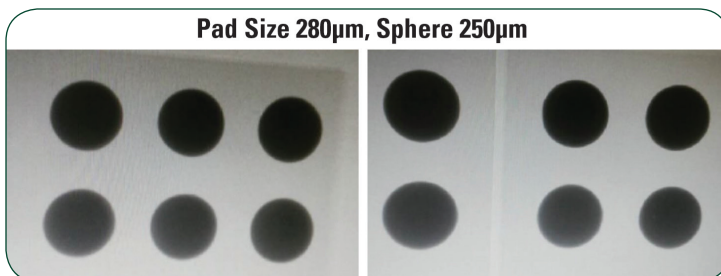

Contact our engineers: [askus@indium.com](mailto:askus@indium.com)

Learn more: [www.indium.com](http://www.indium.com)



## PRODUCT DATA SHEET

# WS-829 Halogen-Free Ball-Attach and LED Die-Attach Flux

## Heterogeneous Integration & Assembly Materials

### 3D Logic / Memory and Flip-Chip


- Wafer Bumping (Bump Fusion) Flux
- Flip-Chip Flux

### System-in-Package

- Wafer-Level Ball-Attach Flux
- Ultrafine-Pitch Solder Paste

### Lidded MEMS

- Dispensable Fine-Pitch Solder Paste

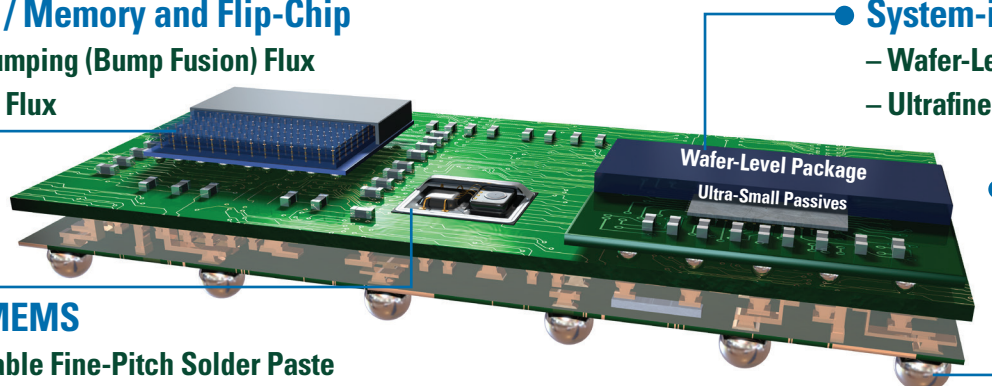

### Ball Grid Array

- Ball-Attach Flux

## Recommended Semiconductor Fluxes and Solder Pastes

Material Group	Material Type	Material Name	Flux Type	Halogen-Free	Application	Comments
FLUX	Wafer Bumping Flux	WS-3543	Water wash	Yes	Spin coating	High viscosity for taller copper pillars and larger bumps (>40 microns)
		WS-3401	Water wash	Yes	Spin coating	Low viscosity for smaller pillars and bumps
	Flip-Chip Flux	WS-446	Water wash	No	Dipping	Best flux for poor solderability
		WS-688	Water wash	Yes	Dipping (can be sprayed at 60°C)	Minimizes voiding
		NC-26-A	Ultra-low residue no-clean	Yes	Dipping	Best compatibility with CUF/MUF
		NC-26S	Ultra-low residue no-clean	Yes	Dipping	Avoids capillary flow up to die surface for fine-pitch devices
	Flip-Chip & Ball-Attach Flux	WS-446HF	Water wash	Yes	Dipping	Best all-around halogen-free flip-chip and ball-mount flux, easily cleaned
	Ball-Attach Flux	WS-446-AL	Water wash	No	Pin transfer	Best flux for poor solderability
		WS-575-C	Water wash	Compliant	Pin transfer	Eliminates the prefluxing step for OSP
		WS-823	Water wash	Yes	Pin transfer	Best all-around halogen-free ball-attach flux, easily cleaned
		WS-829	Water wash	Yes	Pin transfer/ Printing	Best in cleanability, suitable for wafer-level and panel-level packaging (WLP and PLP), and LED die-attach
		WS-759	Water wash	Yes	Printing	Stable printing flux for wafer-level and panel-level packaging (WLP and PLP)

Material Group	Material Type	Material Name	Flux Type	Halogen-Free	Alloy	Comments
SOLDER PASTE	Die-Attach Solder Paste	SMQ75	No-Clean ("Power-Safe")	Yes	All high-Pb and Sb-containing alloys	Ultra-low residue "Power-Safe" (no-clean) paste suitable for clip-bonded devices
		SMQ51-SC	Solvent clean	No		Best all-around cleanable die-attach paste
		BiAgX®	Solvent clean	Yes	BiAgX® mixed alloy system	High-temperature Pb-free solder paste
	SiP Solder Paste	Indium3.2HF	Water wash	Yes	SAC305 and other Pb-free alloys	Type 6-SG solder paste suitable for ultrafine-pitch printing Designed for 01005 and smaller discrete devices

This product data sheet is provided for general information only. It is not intended, and shall not be construed, to warrant or guarantee the performance of the products described which are sold subject exclusively to written warranties and limitations thereon included in product packaging and invoices. All Indium Corporation's products and solutions are designed to be commercially available unless specifically stated otherwise.

All of Indium Corporation's solder paste and preform manufacturing facilities are IATF 16949:2016 certified. Indium Corporation is an ISO 9001:2015 registered company.

Contact our engineers: [askus@indium.com](mailto:askus@indium.com)

Learn more: [www.indium.com](http://www.indium.com)

ASIA +65 6268 8678 • CHINA +86 (0) 512 628 34900 • EUROPE +44 (0) 1908 580400 • USA +1 315 853 4900



©2020 Indium Corporation